


1/8" - 1/16" CHECK VALVE

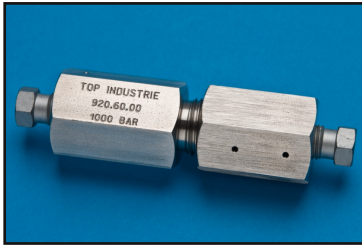

USES :

TOP INDUSTRIE check valves work for pressures up to 2000 bar. They are renowned for their excellent sealing, and therefore prevent backflow.

FEATURES :

- Works for pressures between 0 and 2000 bar.
- Works with both liquids and gases.
- Material : 1.4404 (316L)
- HP Tubing : 1/8" or 1/16"
- Maximum Temperature : 170°C
- Compressed ferrule type HP connection.

- Leak detection holes.

• All our check valves are equipped with ferrules and gland nuts.

- Opening pressure : 3 - 4 bar.

OPTIONS :

- Other materials: Hastelloy B2, C 276, etc.

PRESSURE	HP TUBE		REFERENCE	
	bar / psi	inch		mm
1000		1/8"	3,2	920 60 00
1000		1/16"	1,6	120 60 00
2000		1/16"	1,6	220 60 00

SPARE PARTS	INDEX	NAME	REFERENCE	MATERIAL
	1	SCREW	(*) 01 00	1.4542
	2	GLAND NUT	(*) 02 00	1.4404
	3	REDUCER	920 55 00	1.4404
	4	LENS	920 19 02	1.4542
	5	BALL	920 60 01	CERAMIC
	6	GUIDE	920 60 03	1.4404
	7	SPRING	920 60 04	STAINLESS STEEL
	8	BODY	920 60 02	1.4404

*To order a part: replace the asterix by the first 3 digits of the supplied valve's reference number

In view of possible technological advances in our production methods, the products described in this manual are liable to be modified without prior notice.



TOP INDUSTRIE

High Pressure Engineering

80 rue Marinoni 77013 VAUX LE PENIL CEDEX FRANCE

T : +33 (0) 1 64 10 45 50 F : +33 (0) 1 64 37 62 08

info@top-industrie.fr

www.top-industrie.com

B6A 0111