



1/8" - 1/16" ADAPTER



USES :

TOP INDUSTRIE 1/8"- 1/16" adapters work for pressures up to 2000 bar. They are highly reliable, and renowned for their excellent sealing. TOP INDUSTRIE adapters set the standards in high pressure industry.



FEATURES :


- Works for pressures between 0 and 1000 bar
- Works with both liquids and gases.
- Material : 1.4404 (316L)
- HP Tubing : 1/8" ou 1/16"
- Maximum Temperature : 200°C

- Compressed ferrule type HP connection.
- Leak detection holes.
- All our fittings are equipped with ferrules and gland nuts.


OTHER OPTIONS :

- Other materials : Hastelloy B2, C 276, titanium, etc.


PRESSURE	REFERENCE orifice Ø 1,5 mm	A	B	• ADAPTER FEMALE X FEMALE 1/8" - 1/16" HP F x F NPT/GAS	
				HP TUBE	CONNEXION
bar / psi				mm	mm
1000 14500	920 20 00	1/8"	1/8" NPT	17	35
	920 21 00	1/8"	1/4" NPT	22	35
	920 22 00	1/8"	3/8" NPT	27	40
	920 23 00	1/8"	1/2" NPT	27	40
	920 24 00	1/8"	1/8" GAS	17	35
	920 25 00	1/8"	1/4" GAS	17	35
	920 26 00	1/8"	3/8" GAS	22	40
	920 27 00	1/8"	1/2" GAS	27	40
1000 14500	220 20 00	1/16"	1/8" NPT	17	35
	220 21 00	1/16"	1/4" NPT	22	35
	220 22 00	1/16"	3/8" NPT	27	40
	220 23 00	1/16"	1/2" NPT	27	40
	220 24 00	1/16"	1/8" GAS	17	35
	220 25 00	1/16"	1/4" GAS	17	35
	220 26 00	1/16"	3/8" GAS	22	40
	220 27 00	1/16"	1/2" GAS	27	40
1000 14500	920 36 00	1/8"	1/8" NPT	17	25
	920 37 00	1/8"	1/4" NPT	22	30
	920 38 00	1/8"	3/8" NPT	27	40
	920 39 00	1/8"	1/2" NPT	27	40
	920 40 00	1/8"	1/8" GAS	17	25
	920 41 00	1/8"	1/4" GAS	17	30
	920 42 00	1/8"	3/8" GAS	22	40
	920 43 00	1/8"	1/2" GAS	27	40
1000 14500	220 36 00	1/16"	1/8" NPT	17	25
	220 37 00	1/16"	1/4" NPT	22	30
	220 38 00	1/16"	3/8" NPT	27	40
	220 39 00	1/16"	1/2" NPT	27	40
	220 40 00	1/16"	1/8" GAS	17	25
	220 41 00	1/16"	1/4" GAS	17	30
	220 42 00	1/16"	3/8" GAS	22	40
	220 43 00	1/16"	1/2" GAS	27	40

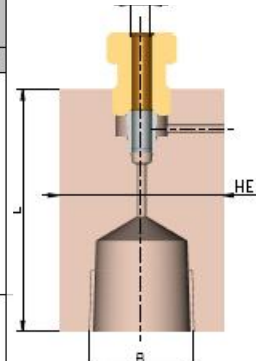


• Conformity NFE 03-004 and E-03-005

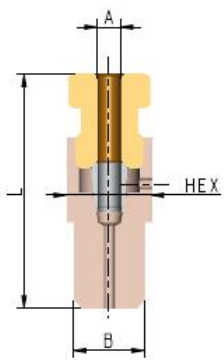

• Conformity NFE 03-004 et E 03-005

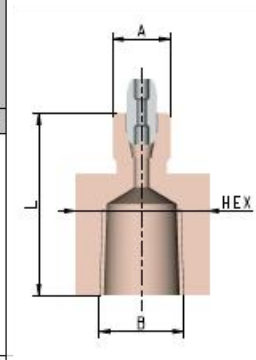

• Lens Réf.: 920 04 00 A for HP male connector 1/8" et 1/16" delivered with connector
• Conformity NFE 03-004 et E 03-005

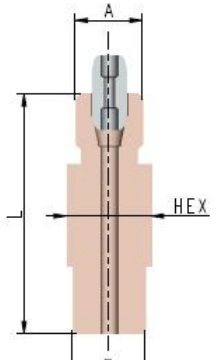

• Lens Réf.: 920 04 00 A for HP male connector 1/8" et 1/16" delivered with connector
• Conformity NFE 03-004 et E 03-005

In view of possible technological advances in our production methods, the products described in this manual are liable to be modified without prior notice.



TOP INDUSTRIE

High Pressure Engineering

80 rue Marinoni 77013 VAUX LE PENIL CEDEX FRANCE

T : +33 (0) 1 64 10 45 50 F : +33 (0) 1 64 37 62 08

info@top-industrie.fr

www.top-industrie.com

B2A 0111